



# OS-2700-010-B

ONE SEVEN PTO-DRIVEN SYSTEM | MUNICIPAL APPLICATION



- Up to 2,700 l/min foam flow
- One (1) 3.0" discharge outlet
- Simultaneous operation of up to two (2) 1.5" nozzles

## DESCRIPTION

The OS-2700-010-B is a medium-sized PTO-driven One Seven system for installation in fire appliances.


The maximum One Seven foam volume is 2,700 l/min, the flow capacity for water/wetting agent is up to 1,000 l/min. The system's working pressure is 8 bar.

The system has one (1) 2.0" foam generator which can supply one (1) 3.0" discharge outlet with a foam flow of 2,100 l/min (300 l water, 1,800 l air), respectively a small monitor with a foam flow rate of up to 2,700 l/min.

In combination with the unique One Seven foaming agents the OS-2700-010-B is a reliable and effective weapon against all kinds of fire.

## ONE SEVEN SYSTEM ADVANTAGES

- Simple, error-free operation due to one-button control
- Operational reliability due to permanent component monitoring and redundancy systems
- Constant foam output due to automatic pressure and flow control
- Consistently optimal foam texture due to automatic control of the mixture of water and foaming agent
- Automatic optimization of system's performance when individual parameters are changed
- Long self-sufficient operating times due to low consumption of foaming agent and water

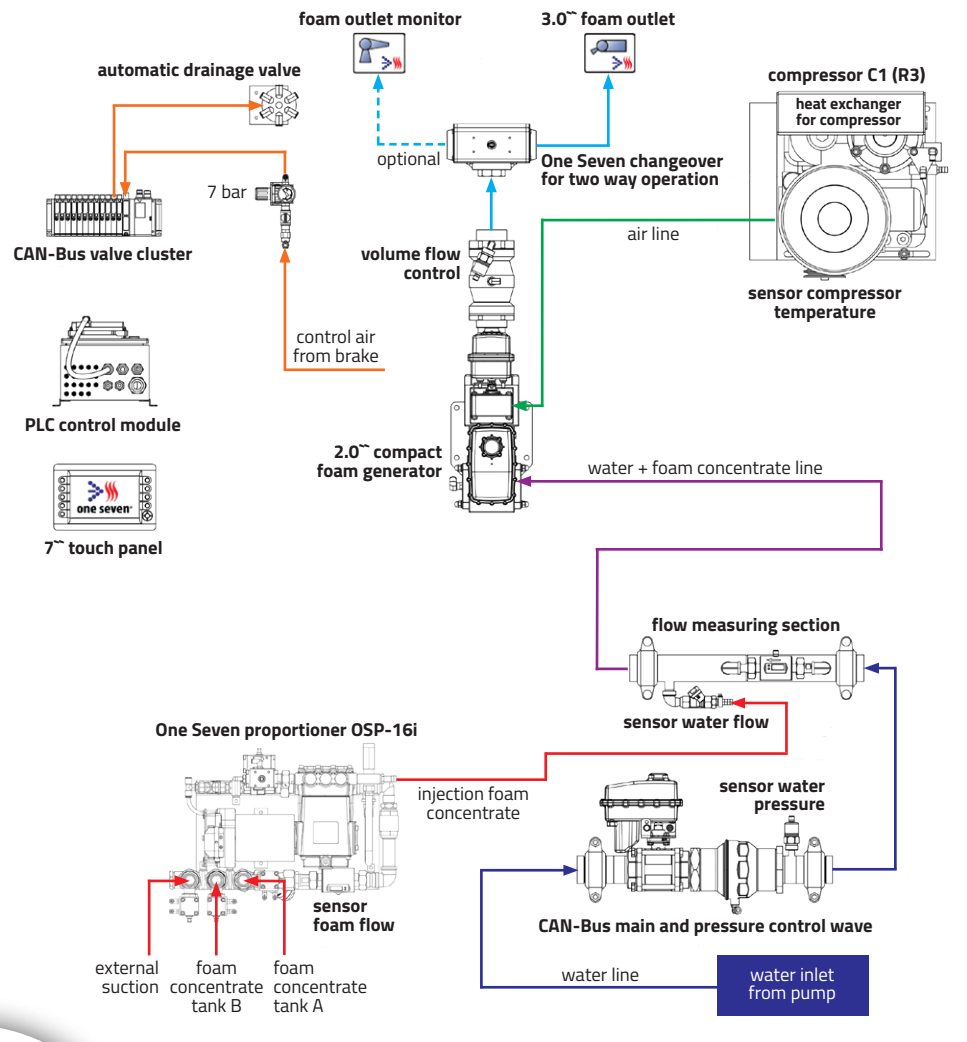

## ONE SEVEN SYSTEM

<b>Standard</b>	CAFS 600/1800 acc. EN 16327, ISO/DIS 7076-6
<b>Foam Capacity</b>	Max. 2,700 l/min
<b>Expansion Ratio</b>	Approx. 7 (wet foam), approx. 20 (dry foam)
<b>Working Pressure</b>	8 bar

## SYSTEM CONFIGURATION

<b>Foam Generators</b>	One (1) 2.0" One Seven Compact Foam Generator (CFG)
<b>Flow Capacity</b>	Wet Foam <sup>1</sup> : up to 400 l/min Water/Wetting agent: up to 1,000 l/min
<b>Optionally Available</b>	One (1) hose reel switchover, up to 150 l/min with automatic flow adjustment One (1) monitor switchover, up to 600 l/min with automatic flow adjustment

<sup>1</sup> amount of water-foam-solution without compressed air

## FOAM PROPORTIONING SYSTEM

<b>Drive</b>	Electric synchronous motor 1 kW, CAN bus controlled, variable speed
<b>Pump</b>	Plunger pump
<b>Water Sensor<sup>2</sup></b>	Magnetic-inductive flow meter, 50 ... 2,000 l/min
<b>Foam Concentrate Sensor</b>	Magnetic-inductive flow meter, 0.1 ... 100 l/min
<b>Performance</b>	0.2 ... 16 l/min at 10 bar
<b>Working Pressure</b>	Max. 16 bar
<b>Proportioning Rate</b>	0.1 ... 9.9 %, adjustable in 0.1 % steps

<sup>2</sup> bigger water flow sensors are optionally available (e. g. 100 ... 3,000 l/min or 200 ... 6,000 l/min)

## COMPRESSED AIR SUPPLY

<b>Source</b>	OS C1 (R3) industrial rotary screw compressor
<b>Drive</b>	Belt drive / hydraulic drive
<b>Power Consumption</b>	Max. 19 kW
<b>Performance</b>	2,300 l/min at maximal pump speed 1,800 l/min at nominal pump speed
<b>Working Pressure</b>	Nom. 8 bar
<b>Cooling</b>	Water cooling



**Schmitz One Seven GmbH**

Am Honigberg 31 | 14943 Luckenwalde | Germany

Phone: +49 3371 6913-0

Fax: +49 3371 6913-99

E-mail: info@oneseven.com

[www.oneseven.com](http://www.oneseven.com)

